


REFLECTOR

**DRIVEN
ELEMENT**

DIRECTOR

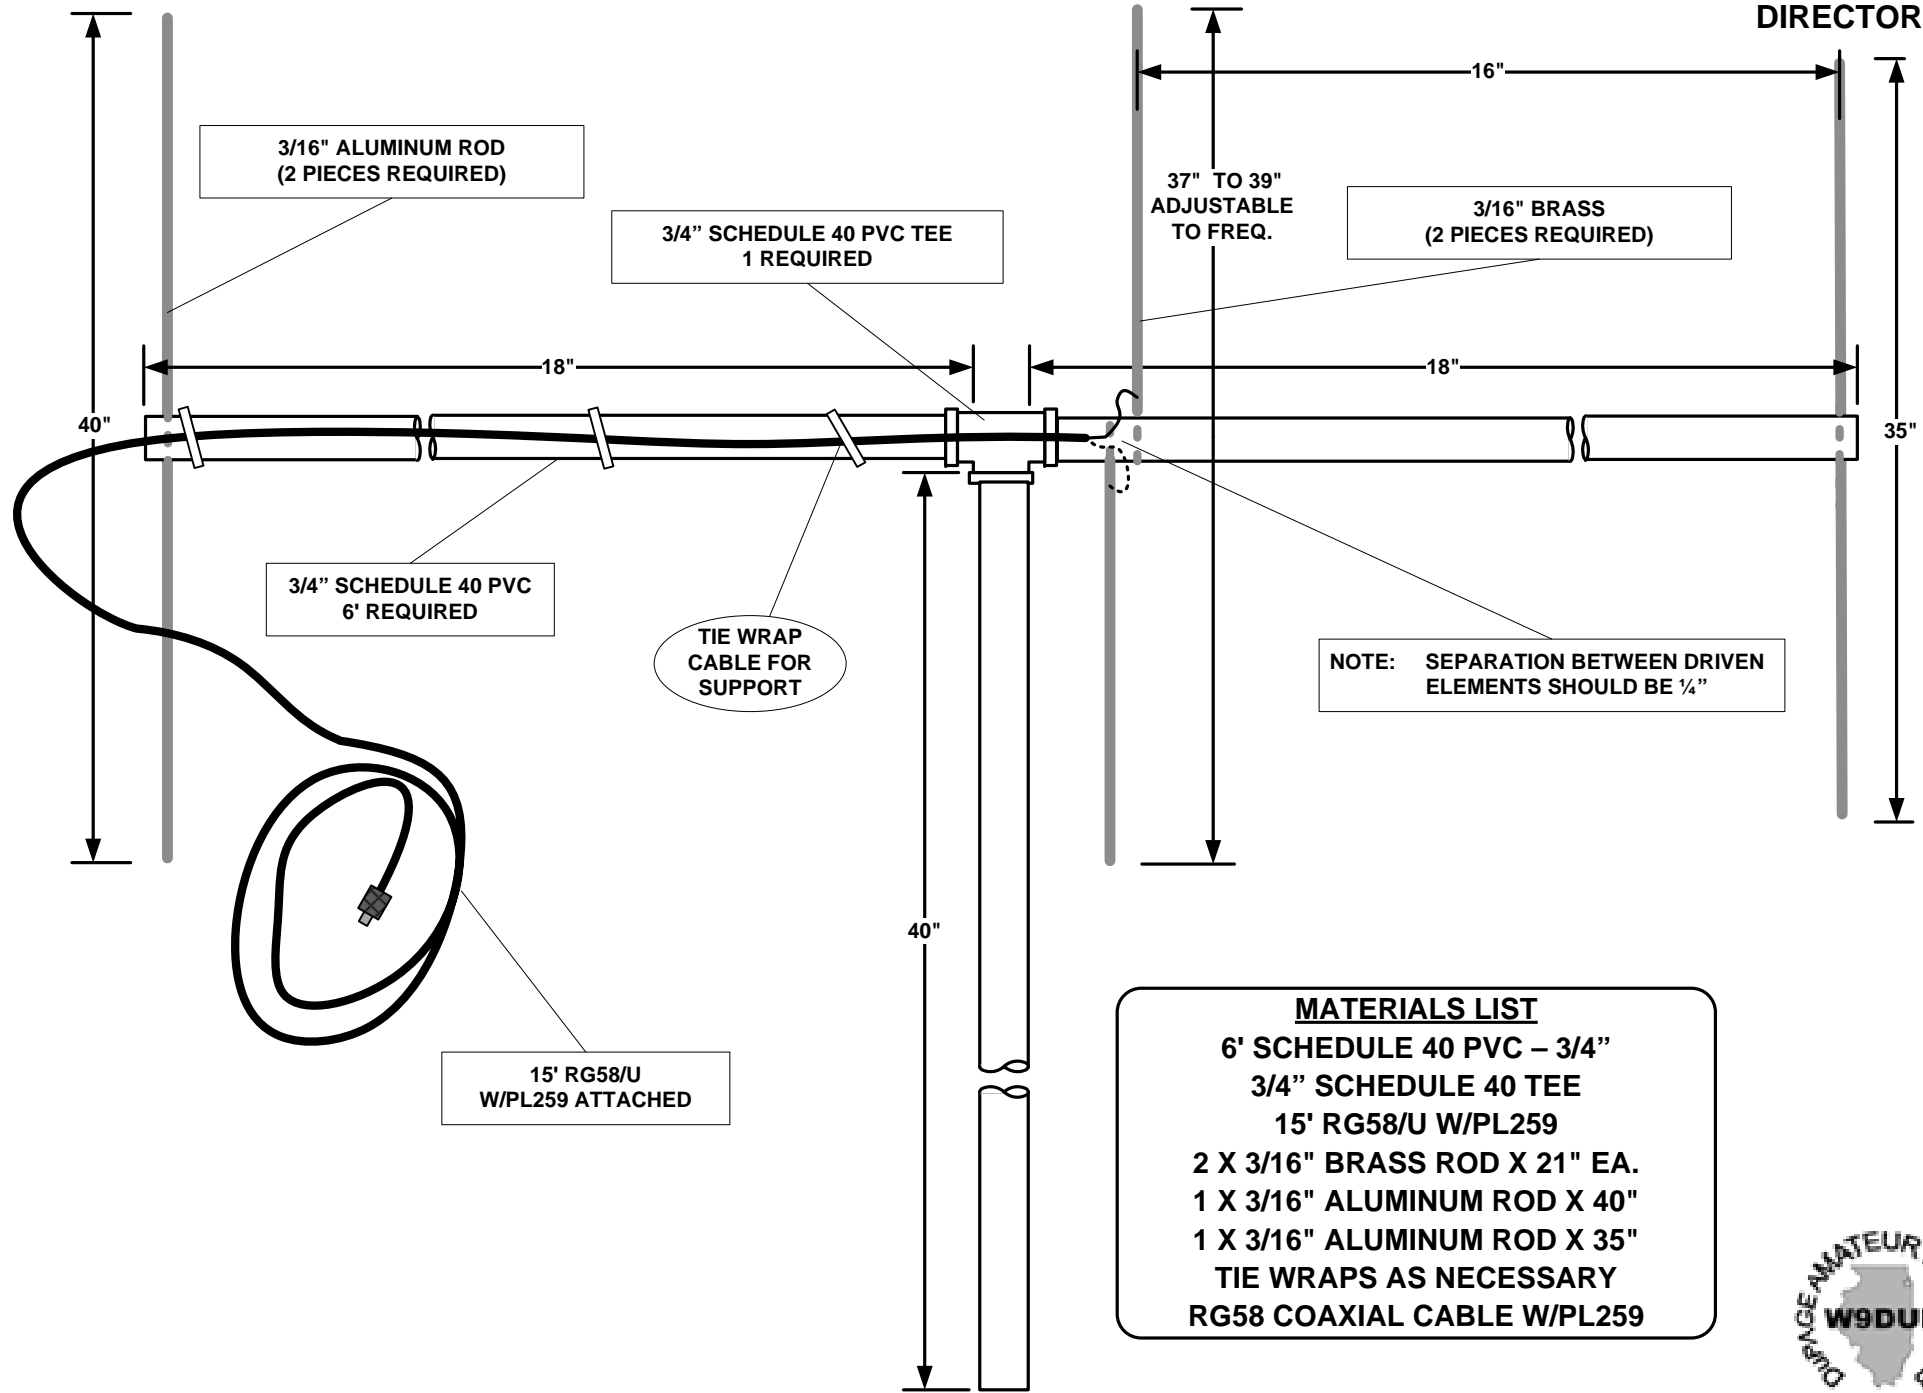

3/16" ALUMINUM ROD
(2 PIECES REQUIRED)

3/4" SCHEDULE 40 PVC TEE
1 REQUIRED

37" TO 39"
ADJUSTABLE
TO FREQ.

3/16" BRASS
(2 PIECES REQUIRED)

3/4" SCHEDULE 40 PVC
6' REQUIRED

TIE WRAP
CABLE FOR
SUPPORT

NOTE: SEPARATION BETWEEN
ELEMENTS SHOULD BE 1/4"

15' RG58/U
W/PL259 ATTACHED

- MATERIALS LIST**
- 6' SCHEDULE 40 PVC – 3/4"
 - 3/4" SCHEDULE 40 TEE
 - 15' RG58/U W/PL259
 - 2 X 3/16" BRASS ROD X 21" EA.
 - 1 X 3/16" ALUMINUM ROD X 40"
 - 1 X 3/16" ALUMINUM ROD X 35"
 - TIE WRAPS AS NECESSARY
 - RG58 COAXIAL CABLE W/PL259



DRAWING IS NOT TO SCALE